



# REJUVENATE

## MULTI SURFACE RESTORER



RENOVATOR / PROTECTOR FOR ALL NON POROUS SURFACES, IN THE CONSTRUCTION , REAL ESTATE, AUTOMOTIVE & REFURBISHMENT INDUSTRY

- RESTORES COLOUR LOST TO WEATHER AND LEAVES A SHINE
- MAKES CLEANING EASIER
- NON-CORROSIVE, LEED CERTIFIED

- LONG-TERM EFFECT
- CAN BE USED ON PLASTICS AND PAINTS
- QUICK AND EASY TO USE

### PRODUCT DESCRIPTION

Rejuvenate® is a product that provides prevention and cure. It allows quick and easy renovation and protection of all non porous surfaces in the construction, real estate, automotive and refurbishment industries.

Rejuvenate® revives the original colour of all plastics, paints, colour bond, aluminium, timber, signage etc. affected by weather conditions. It ensures the protection of material against weathering and day to day staining.

Thanks to its anti-adherent properties, Rejuvenate® makes daily cleaning of equipment easy.

### USE

Rejuvenate® is used for a wide range of surfaces including PVC, colourbond, cladding and composite panels, fiberglass, plastic, metals.

Rejuvenate® restores and protects items such as window and door frames, gutters and down pipes, metal roofing, colour bond fencing, cars and car trims, composite and timber decking, boats, doors, garage doors etc...

### CHEMICAL NATURE


- Polysiloxane mixture.

### ADVANTAGES AND CHARACTERISTICS

- Produces an effect that really revives the colour.
- New Technology: lasts for 3 times longer.
- Suppresses future damage by UV and weathering.
- Economical: very good return
- Low VOC and eco solvent
- LEED certified.
- Indoor air quality A
- Can be reapplied without stripping.

### CONTAINERS

2 Kg and 5 Kg containers.

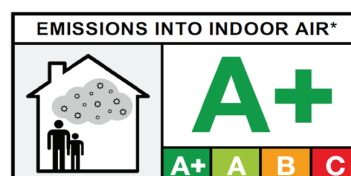

\* Calculated according to substance data.

## TECHNICAL DATA

Physical state at 20°C	: Liquid
Colour	: Colourless
Odour	: Characteristic
pH	: NA
Flash point	: 40°C
Boiling point [°C]	: 180°C
Density	: 1.03 ± 0.02
Water solubility [vol/vol]	: None
VOC	: < 160 g/l*

## HOW TO USE

### Preparation of support:

- Apply the product to a clean, dry surface free of dust and grease (moisture content less than 5% by mass).
- In case of use of a cleaner, rinse thoroughly until the surface is free from any trace of cleaning product and completely dry.

### Application:

- Shake the package thoroughly before use and use the pure product: do not dilute or mix with another product.
- Carry out a preliminary test on a small area.

### STEP 1: APPLY



- Apply in one thin and regular layer.
- Do not overload the support; all of the product must penetrate the surface.

### STEP 2: WIPE



- After 10 minutes, the treated material must be wiped off and polished with a lint-free microfiber cloth.

- Drying protected: 24 hours.

## APPLICATION TOOLS

- Application: Micro Fiber cloth or mop, short-nap roller or brush for acrylic varnish.
- Wiping: Microfibre cloth.



## COVERAGE

Consumption depends on the nature of the support. The following values are given for information:

30 to 40 m<sup>2</sup> / Kg.

## CLEANING YOUR EQUIPMENT

- Clean tools and equipment used with white spirit immediately after use.

## STORAGE

- Store in a dry place at a temperature between 5°C and 30°C.
- Storage: 12 months from date of manufacture, in original packaging unopened.

## RECOMMENDATIONS

- Always handle the product in an aerated area. Otherwise, wear an ABEK-type mask.
- For perfect application and effective protection, **Rejuvenate®** must be shaken and used when the temperature of the supports is above 10°C and below 30°C.
- Do not apply in rainy or very hot weather.
- The ideal air temperature is between 10°C and 30°C.

## HEALTH / SAFETY

- Respiratory protection: Wear an ABEK-type mask.
- Protection of hands: Wear fluoride rubber gloves.
- Protection of skin: Wear suitable safety clothing.
- Protection of eyes: Wear hermetic protective goggles (ref. standard EN 166).
- If swallowed: Do not induce vomiting. Contact a doctor or specialist.

PRODUCT FOR PROFESSIONAL USE

## TECHNICAL ASSISTANCE

### Cretesol (Pty) Ltd

Tel: +27 10 109 8520

Cell: +27 71 681 9610

E-mail: [info@cretesol.co.za](mailto:info@cretesol.co.za)

[www.cretesol.co.za](http://www.cretesol.co.za) | [www.guardindustry.co.za](http://www.guardindustry.co.za)

Important: The content of this document is based on our experience of the product. Guard Industrie guarantees the quality of its products but expressly declines all liability in the event of failure by the user to respect the recommendations and conditions for using the said products, especially but not exclusively in the event of wrong application, application by unqualified personnel, use of products not compatible with the company's products or poor weather conditions. For more information, see safety data sheet.

See the most recent update of our technical data sheet available on our website [www.guardindustrie.com](http://www.guardindustrie.com)

Last update: 11/06/2018